

Cable Ducts

b/s/t PVC Cable Duct WD

Stacking element

Specification ←

Material

PVC-U, high impact strength,
UV-stabilised.

Special model*

Maximum base plate inclination
of 25° for DN 50 – 150

Maximum pipe length

max. 1000 mm

Note

All models are built with two 87° elbow
pipes.


Membrane flange

PVC, EVA (see page 158)

INFO

Please order ←
membrane
flange
separately

Special models ←
on request*

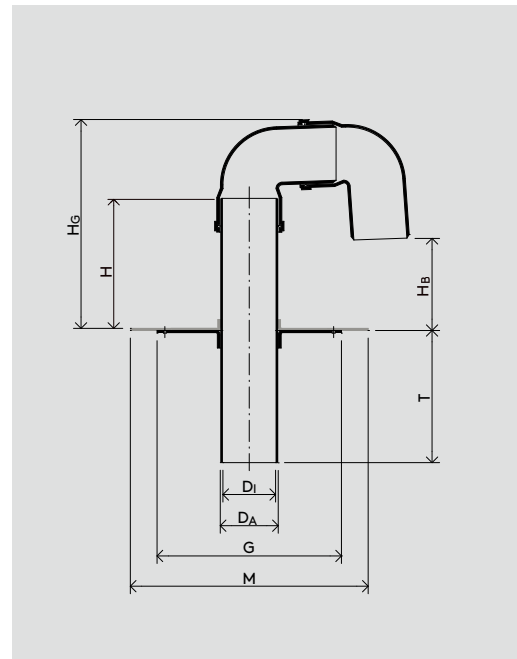

WG 1117 ←

Nominal Width	Product No.	DAØ [mm]	DiØ [mm]	G [mm]	M [mm]	H [mm]	H _G [mm]	H _B [mm]	T [mm]
DN 50	142-WD050	50	46.4	150	300	250	315	215	250
DN 70	142-WD070	75	71.4	200	350	250	340	205	250
DN 100	142-WD100	110	105.4	230	500	250	385	200	250
DN 125	142-WD125	125	120.0	230	500	250	405	200	250
DN 150	142-WD150	160	153.6	280	500	300	495	240	250
DN 200*	142-WD200	200	192.0	400	580	300	540	220	250

* Custom-made products cannot be returned.

Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.