

Info Sheet

b/s/t Shrink Tube


Description

Heat-shrink tubing for the secure termination of pipe edgings.

- High Shrinking rate
- UV - stable
- Internal adhesive
- Color: black

Technical Data

Description	b/s/t Shrink Tube
Material	Polyolefine
Shrinking rate	3:1
Application Temperature	-55 °C to +110 °C
Shrinking Temperature	min. 120 °C
Storage Temperature	max. 30 °C
Flammability	not flame retardent
Longitudinal shrinking	max. ± 10 %
Tensile Strength	>12,0 MPa
Puncture Resistance	>20,0 kV/mm

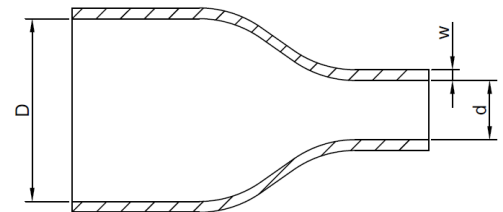

Shrink tube

Type	Product No.	Before Shrink Ø (D) [mm]	After Shrink Ø (d) [mm]	Wall thickness (w) [mm]	Length [mm]
22/6	171-SSL022-6	22,00	6,00	2,50	600
33/8	171-SSL033-8	33,00	8,00	2,50	600
55/16	171-SSL055-16	55,00	16,00	2,80	600
85/25	171-SSL085-25	85,00	25,00	3,00	600
115/34	171-SSL115-34	115,00	34,00	3,20	600
140/42	171-SSL140-42	140,00	42,00	3,30	600