

Accessories Flat Roof / Installation Parts

b/s/t Shrink Tube


Specification ← Material
Polyolefine

Suitable for
Tube/Multi-Flange to Ø 135 mm

Properties
shrinking rate 3:1;
application temperature -55 °C to +110 °C;
max. storage temperature 30 °C;
internal adhesive; black

INFO ← Image for demonstration only

Special models ← on request*

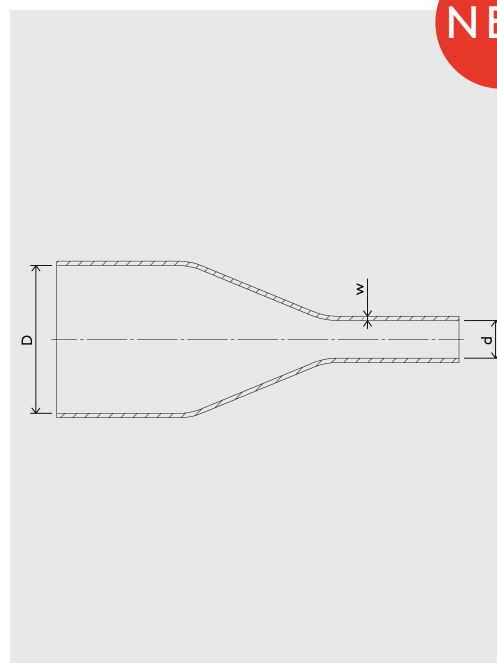

WG 1116 ←

Type	Product-No.	Before Shrink Ø D [mm]	After Shrink Ø d [mm]	Wall thickness w [mm]	Length [mm]
22/6	171-SSL022-6	22,0	6,0	2,5	600
33/8	171-SSL033-8	33,0	8,0	2,5	600
55/16	171-SSL055-16	55,0	16,0	2,8	600
85/25	171-SSL085-25	85,0	25,0	3,0	600
115/34	171-SSL115-34	115,0	34,0	3,2	600
140/42	171-SSL140-42	140,0	42,0	3,3	600

* Custom-made products cannot be returned.

Status: 07/24 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.