

Accessories Flat Roof/Installation Parts

b/s/t PVC Socket Pipe (L=300/600)


Specification ←

Material

PVC-U, high impact strength,
UV-stabilised, incl. sealing ring

Suitable for

Pipelines with outside diameters
 D_A according to table

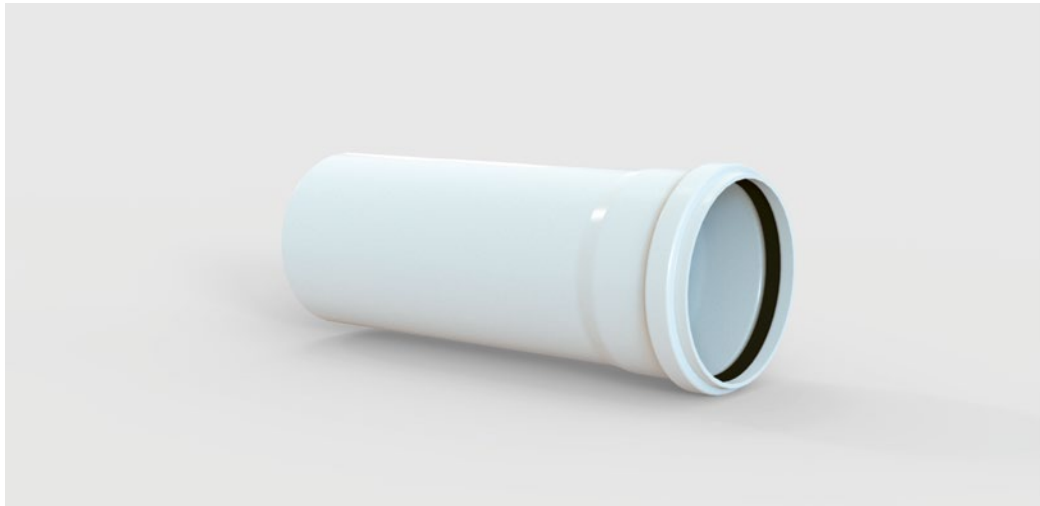

WG 4995 ←

<u>Nominal Width</u>	<u>Product No.</u>	<u>$D_A \varnothing$ [mm]</u>	<u>Length [mm]</u>	<u>Nominal Width</u>	<u>Product No.</u>	<u>$D_A \varnothing$ [mm]</u>	<u>Length [mm]</u>
DN 50	199-M050300	50	300	DN 50	199-M050600	50	600
DN 70	199-M070300	75	300	DN 70	199-M070600	75	600
DN 100	199-M100300	110	300	DN 100	199-M100600	110	600
DN 125	199-M125300	125	300	DN 125	199-M125600	125	600
DN 150	199-M150300	160	300	DN 150	199-M150600	160	600
DN 200	199-M200300	200	300	DN 200	199-M200600	200	600
DN 250	199-M250300	250	300	DN 250	199-M250600	250	600