

Flat Roof Drains

b/s/t ALIT Retrofit Drain

Specification ←

Material
Aluminium

Including
b/s/t Universal gravel guard
high impact strength, UV-stabilised
b/s/t Universal Anti Backflow Seal

Pipe length
450 mm


For the safe connection of outlets to downpipes without existing sleeve; verification of fit to existing drain is the responsibility of the installer.

Membrane flange
Polyolefin, EPDM, ECB, PIB, PVC etc.
(see page 158 – 159)

INFO

Please order ←
membrane
flange
separately

Special models ←
on request*

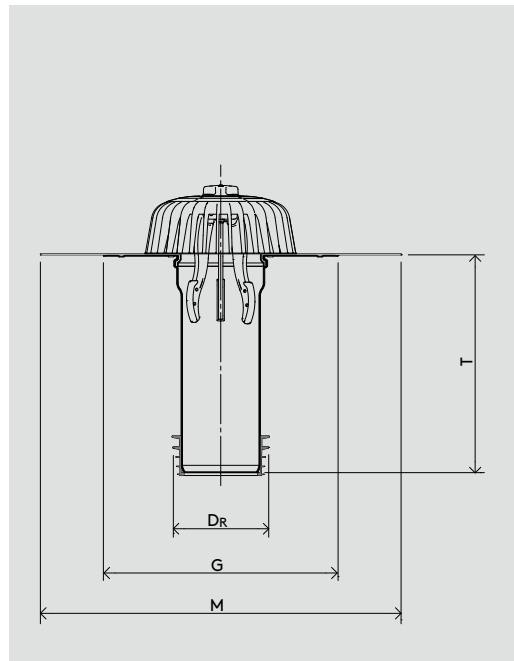

b/s/t
Koch Kunst-
stofftechnologie
Nordstraße 1
83253 Rimsting



WG 1212 ←

Nominal Width	Product No.	D _R ** Ø [mm]	D _V *** Ø [mm]	G Ø [mm]	M [mm]	T [mm]	Q**** [l/sek]	h _G ***** [mm]
DN 70	A121-SG070450	87 – 108	83 – 106	325	500	450	4.40	35
DN 80	A121-SG080450	105 – 111	101 – 108	325	500	450	5.00	35
DN 100	A121-SG100450	120 – 135	116 – 131	325	500	450	6.00	35
DN 125	A121-SG125450	152 – 160	148 – 158	325	500	450	9.00	45

* Custom-made products cannot be returned.

** D_R = DR = outer diameter - area of the sealing lip

*** D_V = inside diameter, range calibration of the existing drain pipe

**** Q [l/sek] Discharge capacity at the water level h_G at the gully

***** h_G [mm] Water level height/pressure height at the drain

Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.