

# Cable Ducts


## b/s/t ALIT Cable Duct WD Bitumen

Stacking element

Specification ← Material  
Aluminium

Note  
Model with two high impact strength 87°  
PVC elbow pipes, UV-stabilised

Membrane flange  
SBS bitumen roofing membrane

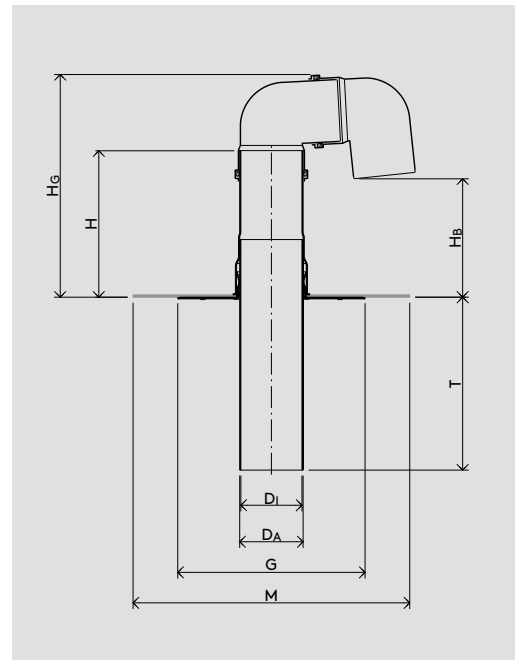

WG 1215 ←

Nominal Width	Product No.	$D_A \varnothing$ [mm]	$D_I \varnothing$ [mm]	$G \varnothing$ [mm]	$M \varnothing$ [mm]	H [mm]	$H_G$ [mm]	$H_B$ [mm]	T [mm]
DN 70	A142-BWD070	75	71	325	480	250	340	205	300
DN 100	A142-BWD100	110	106	325	480	250	385	200	300
DN 125	A142-BWD125	125	121	325	480	250	405	200	300
DN 150	A142-BWD150	160	156	325	480	300	495	240	300