

Cable Ducts


b/s/t ALIT Energy Supply Duct WD Bitumen

Stacking element

Specification ← Material
Aluminium

Note
Model with four high impact strength 45°
PVC elbow pipes, UV-stabilised

Membrane flange
SBS bitumen roofing membrane

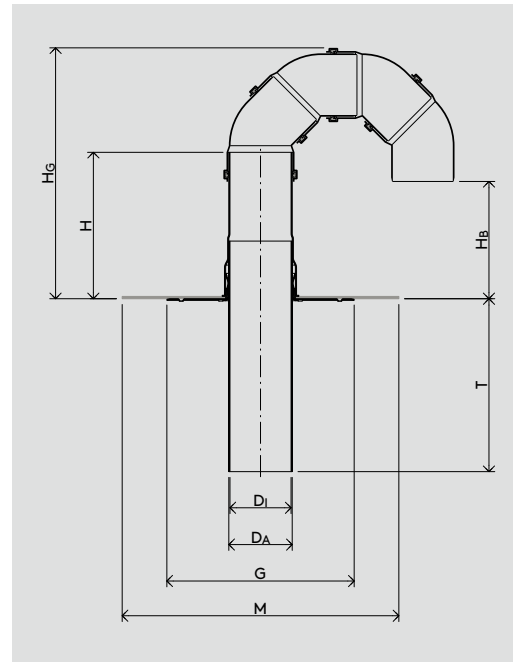

WG 1215 ←

Nominal Width	Product No.	$D_A \varnothing$ [mm]	$D_I \varnothing$ [mm]	$G \varnothing$ [mm]	$M \varnothing$ [mm]	H [mm]	H_G [mm]	H_B [mm]	T [mm]
DN 100	A143-BWD100	110	106	325	480	250	435	190	300
DN 125	A143-BWD125	125	121	325	480	250	450	190	300
DN 150	A143-BWD150	160	156	325	480	300	550	230	300