

# Cable Ducts

## b/s/t ALIT Energy Supply Duct WD

Stacking element


Specification ← Material  
Aluminium

Note  
Model with four high impact strength 45° PVC elbow pipes, UV-stabilised

Membrane flange  
Polyolefin, EPDM, ECB, PIB, PVC etc.  
(see page 158 – 159)

INFO Please order ←  
membrane  
flange  
separately

Special models ←  
on request\*

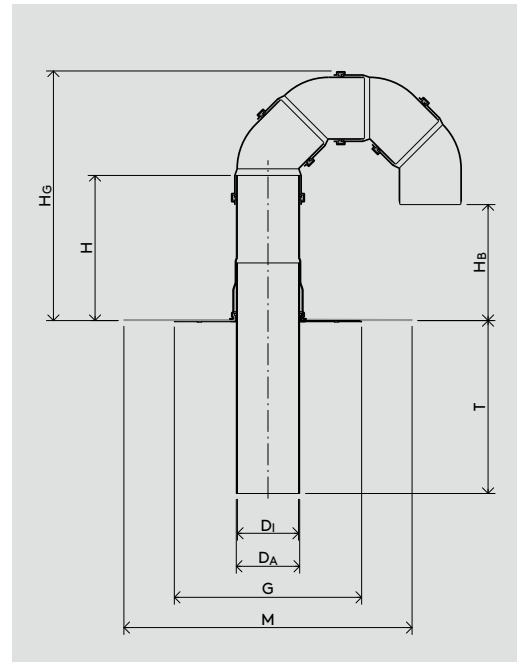

WG 1215 ←

Nominal Width	Product No.	DAØ [mm]	DIØ [mm]	GØ [mm]	M [mm]	H [mm]	HG [mm]	HB [mm]	T [mm]
DN 100	A143-WD100	110	106	325	500	250	435	190	300
DN 125	A143-WD125	125	121	325	500	250	450	190	300
DN 150	A143-WD150	160	156	325	500	300	550	230	300

\* Custom-made products cannot be returned.  
Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.