

# Moisture Control

## b/s/t PE Control Pipe

Testing device for non-destructive moisture control on insulated flat roofs

**Specification** ← Material  
PE, high impact strength, UV-stabilized

Including PVC Control Pipe Cap (removable, high impact strength, UV-stabilized) with sealing ring and EPS-foam Pipe Core

Maximum pipe length  
max. 1000 mm

Special model\*  
– Pipe length selectable up and down

Membrane flange  
PE (see page 159)

According to Ö-Norm B3691, additional service operations are required for roofs in use category K3. One of these service requirements is the installation of detection systems that enable non-destructive moisture control.


INFO

Please order ←  
membrane  
flange  
separately

Special models ←  
on request\*



NEW

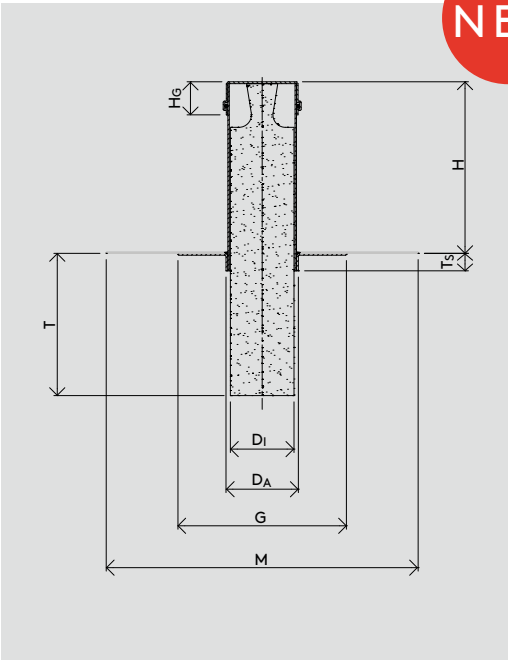

WG 2111 ←

Nominal Width	Product No.	DAØ [mm]	DiØ [mm]	G [mm]	M [mm]	H [mm]	Hg [mm]	Ts [mm]	T [mm]
DN 100	PE112-100	116	102	270	500	275	53	28	228

\* Custom-made products cannot be returned.  
Status: 03.22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.