

Flat Roof Drains

b/s/t PE Drain

Stacking element

Specification ←

Material
PE, high impact strength, UV-stabilised

Maximum pipe length
max. 1000 mm

Special model*
DN 250, DN 300

Membrane flange
PE (see page 159)


INFO

Please order ←
membrane
flange
separately

Special models ←
on request*



Ø bis 300

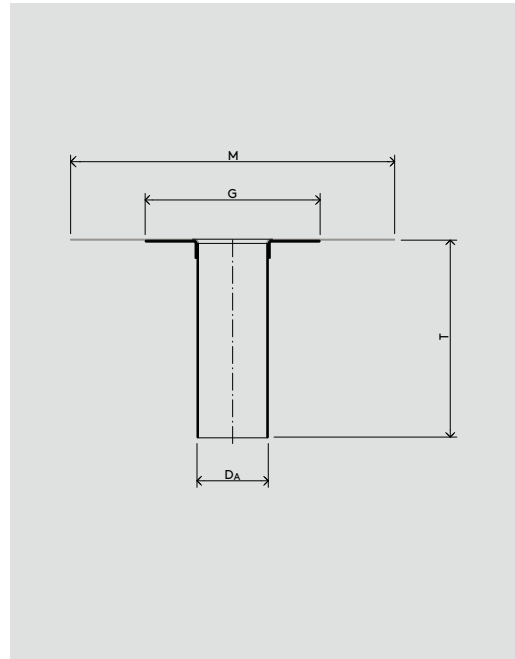

b/s/t
Koch Kunst-
stofftechnologie
Nordstraße 1
83253 Rimsting



WG 2112 ←

Nominal Width	Product No.	DAØ [mm]	G [mm]	M [mm]	T [mm]	Q** [l/sek]	hG*** [mm]
DN 50	PE121-050	50	200	350	300	0.90	35
DN 70	PE121-070	75	200	350	300	4.40	35
DN 80	PE121-080	90	200	350	300	5.00	35
DN 100	PE121-100	110	270	500	300	6.00	35
DN 125	PE121-125	125	270	500	300	9.00	45
DN 150	PE121-150	160	270	500	300	10.60	45
DN 200*	PE121-200	200	400	580	300	13.00	45

* Custom-made products cannot be returned.

** Q [l/sek] Discharge capacity at the water level hG at the gully

*** hG [mm] Water level height/pressure height at the drain

Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.