

Cable Ducts

b/s/t PE Cable Duct KD


Specification ← **Material**
PE, high impact strength, UV-stabilised

Note
Model with two high impact strength 87° PVC elbow pipes, UV-stabilised

Membrane flange
PE (see page 159)

INFO Please order ←
membrane
flange
separately

Special models ←
on request*

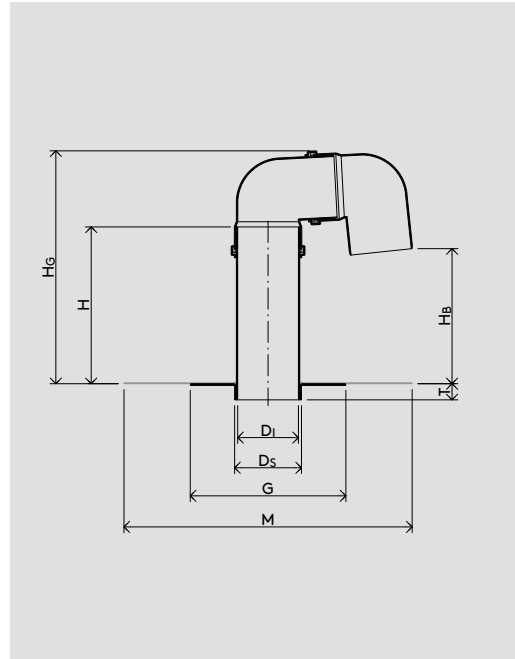

WG 2117 ←

Nominal Width	Product No.	D ₁ ∅ [mm]	D _s ∅ [mm]	G [mm]	M [mm]	H [mm]	H _G [mm]	H _B [mm]	T [mm]
DN 50	PE142-KD050	44.0	56	200	350	272	337	237	28
DN 70	PE142-KD070	71.2	81	200	350	272	362	227	28
DN 100	PE142-KD100	104.6	116	270	500	272	407	222	28
DN 125	PE142-KD125	118.8	131	270	500	272	427	220	28
DN 150	PE142-KD150	152.0	166	270	500	272	468	210	28
DN 200*	PE142-KD200	187.6	206	400	580	272	512	192	28

* Custom-made products cannot be returned.
Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.