

# Cable Ducts

## b/s/t PE Cable Duct WD

Stacking element

**Specification** ← Material  
PE, high impact strength, UV-stabilised

Maximum pipe length  
max. 1000 mm


Note  
Model with two 87° PVC elbow pipes,  
UV-stabilised

Membrane flange  
PE (see page 159)

INFO

Please order ←  
membrane  
flange  
separately

Special models ←  
on request\*

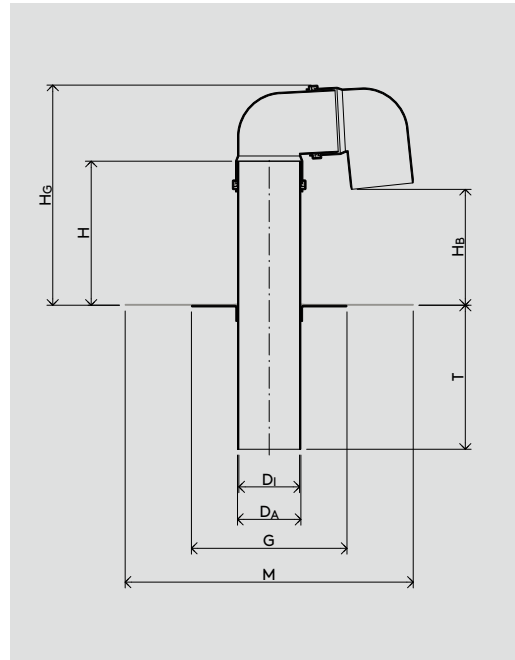

WG 2117 ←

Nominal Width	Product No.	DAØ [mm]	DiØ [mm]	G [mm]	M [mm]	H [mm]	H <sub>G</sub> [mm]	H <sub>B</sub> [mm]	T [mm]
DN 50	PE142-WD050	50	44.0	200	350	250	315	215	250
DN 70	PE142-WD070	75	71.2	200	350	250	340	205	250
DN 100	PE142-WD100	110	104.6	270	500	250	385	200	250
DN 125	PE142-WD125	125	118.8	270	500	250	405	200	250
DN 150	PE142-WD150	160	152.0	270	500	300	495	240	250
DN 200*	PE142-WD200	200	187.6	400	580	300	540	220	250

\* Custom-made products cannot be returned.

Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.