

Cable Ducts

b/s/t PE Energy Supply Duct WD

Stacking element

Specification ← **Material**
PE, high impact strength, UV-stabilised


Maximum pipe length
max. 1000 mm

Note
Model with four high impact strength 45° PVC elbow pipes, UV-stabilised

Membrane flange
PE (see page 159)

INFO Please order ←
membrane
flange
separately

Special models ←
on request*

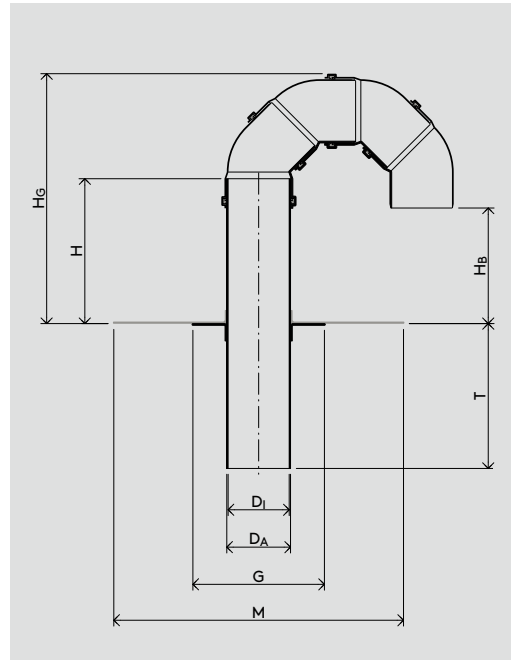

WG 2117 ←

Nominal Width	Product No.	DA Ø [mm]	Di Ø [mm]	G [mm]	M [mm]	H [mm]	Hg [mm]	Hb [mm]	T [mm]
DN 100	PE143-WD100	110	104.6	270	500	250	420	190	250
DN 125	PE143-WD125	125	118.8	270	500	250	450	190	250
DN 150	PE143-WD150	160	152.0	270	500	300	550	230	250

* Custom-made products cannot be returned.
Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.