

Flat Roof Drains

b/s/t PP Retrofit Drain

Specification ← **Material**
PP, high impact strength, UV-stabilised

Including
b/s/t Universal gravel guard
high impact strength, UV-stabilised
b/s/t Universal Anti Backflow Seal


Special model*
Maximum pipe length 1000 mm

For the safe connection of outlets to downpipes without existing sleeve; verification of fit to existing drain is the responsibility of the installer.

Membrane flange
PP (see page 159)

INFO Please order ←
membrane
flange
separately

Special models ←
on request*

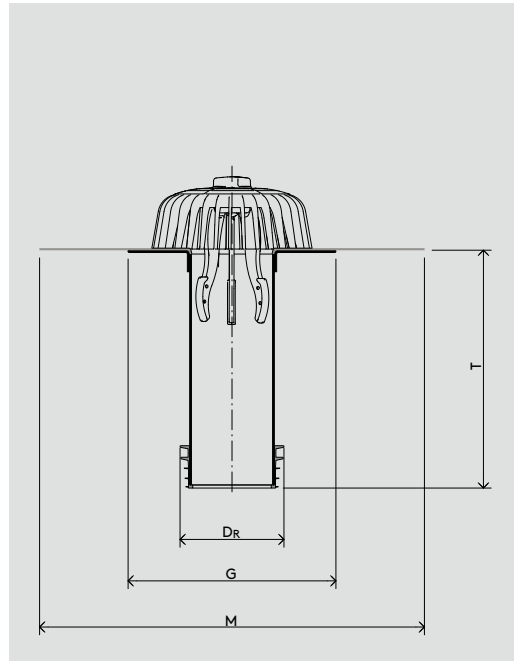

b/s/t
Koch Kunst-
stofftechnologie
Nordstraße 1
83253 Rimsting



WG 2112 ←

Nominal Width	Product No.	DR**Ø [mm]	Dv***Ø [mm]	G [mm]	M [mm]	T [mm]	Q**** [l/sek]	hg***** [mm]
DN 70	PP121-SG070	87 – 108	83 – 106	200	350	300	4.40	35
DN 80	PP121-SG080	105 – 111	101 – 108	200	350	300	5.00	35
DN 100	PP121-SG100	120 – 135	116 – 131	270	500	300	6.00	35
DN 125	PP121-SG125	152 – 160	148 – 158	270	500	300	9.00	45
DN 150	PP121-SG150	194 – 200	190 – 195	270	500	300	10.60	45

* Custom-made products cannot be returned.

** DR = DR = outer diameter - area of the sealing lip

*** Dv = inside diameter, range calibration of the existing drain pipe

**** Q [l/sek] Discharge capacity at the water level hG at the gully

***** hg [mm] Water level height/pressure height at the drain

Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.