

Cable Ducts

b/s/t PP Cable Duct WD

Stacking element

Specification ←

Material

PP, high impact strength, UV-stabilised

Maximum pipe length

max. 1000 mm

Note

Model with two 87° PVC elbow pipes, high impact strength, UV-stabilised


Membrane flange

PP (see page 159)

INFO

Please order ←
membrane
flange
separately

Special models ←
on request*

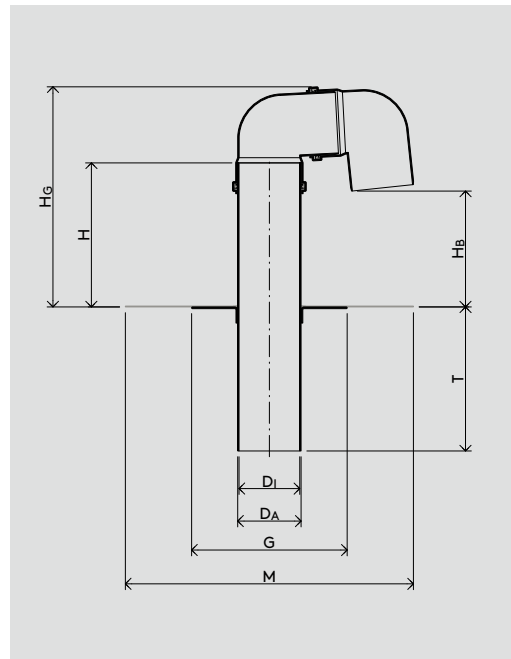

WG 2117 ←

Nominal Width	Product No.	DA Ø [mm]	Di Ø [mm]	G [mm]	M [mm]	H [mm]	H _G [mm]	H _B [mm]	T [mm]
DN 50	PP142-WD050	50	44.2	200	350	250	315	215	250
DN 70	PP142-WD070	75	69.2	200	350	250	340	205	250
DN 100	PP142-WD100	110	104.6	270	500	250	385	200	250
DN 125	PP142-WD125	125	118.8	270	500	250	405	200	250
DN 150	PP142-WD150	160	152.0	270	500	300	495	240	250
DN 200*	PP142-WD200	200	187.6	400	580	300	540	220	250

* Custom-made products cannot be returned.

Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.