

# Cable Ducts

## b/s/t PP Energy Supply Duct WD

Stacking element

**Specification** ← Material  
 PP, high impact strength, UV-stabilised

Maximum pipe length  
 max. 1000 mm


Note  
 Model with four high impact strength 45° PVC elbow pipes, UV-stabilised

Membrane flange  
 PP (see page 159)

INFO

Please order ←  
 membrane  
 flange  
 separately

Special models ←  
 on request\*

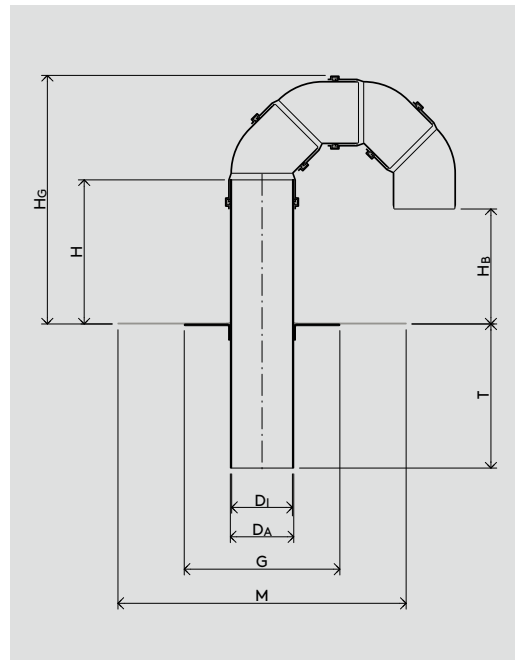

**WG 2117** ←

Nominal Width	Product No.	DAØ [mm]	DiØ [mm]	G [mm]	M [mm]	H [mm]	HG [mm]	Hb [mm]	T [mm]
DN 100	PP143-WD100	110	104.6	270	500	250	420	190	250
DN 125	PP143-WD125	125	118.8	270	500	250	450	190	250
DN 150	PP143-WD150	160	152.0	270	500	300	550	230	250

\* Custom-made products cannot be returned.  
 Status: 03/22 b/s/t GmbH Koch Kunststofftechnologie reserves the right to make technical modifications.